



# CAM-Finder 2

Version 2022/02/07

**DIVIO**<sup>Tec</sup>  
TM

# Content

- Features .....p.3-7
- Search Camera .....p.8-9
- Assign IP .....p.10-12
- Web Page .....p.13-14
- Firmware Upgrade .....p.15-17
- Configuration .....p.18-22
- Enable DHCP .....p.23-25
- Set Default IP .....p.26-28
- Export Information .....p.29-31



# Features

At DivioTec, our experience is your protection

**DIVIO**<sup>Tec</sup>  
TM

www.diviotec.com



# New Cam-Finder UI Design

IP CAM-FINDER 2 v1.3.1

Search
 Assign IP
 Web Page
 Firmware Upgrade
 Configuration
 Enable DHCP
 Set Default IP
 Export Information


[...]	IP	Status	Model Name	Login ID	Login Password	S/N	MAC	Firmware	DHCP
<input type="checkbox"/>	192.168.0.202		NBR126PA-5023121			TSCBC1025579	58:E8:76:60:5B:95	camC1Q.DV0030	Disab...
<input type="checkbox"/>	192.168.0.204		NBR126PA-5023121			TSCBC1025596	58:E8:76:60:5B:91	camC1Q.DV0030	Disab...
<input type="checkbox"/>	192.168.0.211		NBR126PA-5023121			TSCBC1025585	58:E8:76:60:5B:86	camC1Q.DV0030	Disab...
<input type="checkbox"/>	192.168.0.207		NBR126PA-5023121			TSCBC1025604	58:E8:76:60:5B:99	camC1Q.DV0030	Disab...
<input type="checkbox"/>	192.168.0.108		NDR154P-522166			180501556	58:E8:76:60:0A:DC	cam16D.DV0108	Disab...
<input type="checkbox"/>	192.168.0.208		NBR126PA-5023121			TSCBC1025597	58:E8:76:60:5B:90	camC1Q.DV0030	Disab...
<input type="checkbox"/>	192.168.0.209		NBR126PA-5023121			TSCBC1025598	58:E8:76:60:5B:8F	camC1Q.DV0030	Disab...
<input checked="" type="checkbox"/>	192.168.0.210		NBR126PA-5023121			TSCBC1025589	58:E8:76:60:5B:81	camC1Q.DV0030	Disab...
<input type="checkbox"/>	192.168.0.205		NBR126PA-5023121			TSCBC1025587	58:E8:76:60:5B:89	camC1Q.DV0030	Disab...
<input type="checkbox"/>	192.168.0.203		NBR126PA-5023121			TSCBC1025584	58:E8:76:60:5B:8D	camC1Q.DV0030	Disab...
<input type="checkbox"/>	192.168.0.201		NBR126PA-5023121			TSCBC1025591	58:E8:76:60:5B:88	camC1Q.DV0030	Disab...
<input type="checkbox"/>	192.168.0.200		NBR126PA-5023121			TSCBC1025590	58:E8:76:60:5B:84	camC1Q.DV0030	Disab...
<input type="checkbox"/>	192.168.0.206		NBR126PA-5023121			TSCBC1025588	58:E8:76:60:5B:83	camC1Q.DV0030	Disab...


# Upgrade


www.diviotec.com


- Reveal more camera information on the table.
- Add four new functions: Enable DHCP, Set Default IP, Export Information and Configuration Import/Export
- Allow Multiple Firmware Update
- Ameliorate and beautify UI Interface


IP CAM-FINDER 2 v1.3.1


 Search


 Assign IP


 Web Page

 Firmware Upgrade


 Configuration

 Enable DHCP

 Set Default IP

 Export Information

[...]	IP	Status	Model Name	Login ID	Login Password	S/N	MAC	Firmware	DHCP
<input type="checkbox"/>	192.168.0.202		NBR126PA-5023121			TSCBC1025579	58:E8:76:60:5B:95	camC1Q.DV0030	Disab...
<input type="checkbox"/>	192.168.0.204		NBR126PA-5023121			TSCBC1025596	58:E8:76:60:5B:91	camC1Q.DV0030	Disab...
<input type="checkbox"/>	192.168.0.211		NBR126PA-5023121			TSCBC1025585	58:E8:76:60:5B:86	camC1Q.DV0030	Disab...
<input type="checkbox"/>	192.168.0.207		NBR126PA-5023121			TSCBC1025604	58:E8:76:60:5B:99	camC1Q.DV0030	Disab...
<input type="checkbox"/>	192.168.0.108		NDR154P-522166			180501556	58:E8:76:60:0A:DC	cam16D.DV0108	Disab...
<input type="checkbox"/>	192.168.0.208		NBR126PA-5023121			TSCBC1025597	58:E8:76:60:5B:90	camC1Q.DV0030	Disab...
<input type="checkbox"/>	192.168.0.209		NBR126PA-5023121			TSCBC1025598	58:E8:76:60:5B:8F	camC1Q.DV0030	Disab...
<input checked="" type="checkbox"/>	192.168.0.210		NBR126PA-5023121			TSCBC1025589	58:E8:76:60:5B:81	camC1Q.DV0030	Disab...
<input type="checkbox"/>	192.168.0.205		NBR126PA-5023121			TSCBC1025587	58:E8:76:60:5B:89	camC1Q.DV0030	Disab...
<input type="checkbox"/>	192.168.0.203		NBR126PA-5023121			TSCBC1025584	58:E8:76:60:5B:8D	camC1Q.DV0030	Disab...
<input type="checkbox"/>	192.168.0.201		NBR126PA-5023121			TSCBC1025591	58:E8:76:60:5B:88	camC1Q.DV0030	Disab...
<input type="checkbox"/>	192.168.0.200		NBR126PA-5023121			TSCBC1025590	58:E8:76:60:5B:84	camC1Q.DV0030	Disab...
<input type="checkbox"/>	192.168.0.206		NBR126PA-5023121			TSCBC1025588	58:E8:76:60:5B:83	camC1Q.DV0030	Disab...



# Comparison Table

Upgrade	CAM-Finder	CAM-Finder V2.0
Model	All types of DivioTec IP cameras	
Assign IP	V	V
Web Page	V	V
Firmware Upgrade	Single camera FW upgrade	Multiple cameras FW upgrade
Configuration		V (allows user to import/export camera settings)
Enable DHCP		V
Set Default IP		V
Export Information		V

How to search camera ?



# How to search camera ?

IP CAM-FINDER 2 v1.3.1

Step 1: Choose Search

Search Assign IP Web Page Firmware Upgrade Configuration Enable DHCP Set Default IP Export Information


[...]	IP	Status	Model Name	Login ID	Login Password	S/N	MAC	Firmware	DHCP
<input checked="" type="checkbox"/>	192.168.0.202		NBR 126PA-5023121			TSC		camC1Q.DV0030	Disab...
<input type="checkbox"/>	192.168.0.204		NBR 126PA-5023121			TSC		camC1Q.DV0030	Disab...
<input type="checkbox"/>	192.168.0.211		NBR 126PA-5023121			TSC		camC1Q.DV0030	Disab...
<input type="checkbox"/>	192.168.0.207		NBR 126PA-5023121			TSC		camC1Q.DV0030	Disab...
<input type="checkbox"/>	192.168.0.108		NDR 154P-522166			180		cam16D.DV0108	Disab...
<input type="checkbox"/>	192.168.0.208		NBR 126PA-5023121			TSC		camC1Q.DV0030	Disab...
<input type="checkbox"/>	192.168.0.209		NBR 126PA-5023121			TSC		camC1Q.DV0030	Disab...
<input type="checkbox"/>	192.168.0.210		NBR 126PA-5023121			TSC		camC1Q.DV0030	Disab...
<input type="checkbox"/>	192.168.0.205		NBR 126PA-5023121			TSC		camC1Q.DV0030	Disab...
<input type="checkbox"/>	192.168.0.203		NBR 126PA-5023121			TSCBC1025584	58:E8:76:60:58:8D	camC1Q.DV0030	Disab...
<input type="checkbox"/>	192.168.0.201		NBR 126PA-5023121			TSCBC1025591	58:E8:76:60:58:88	camC1Q.DV0030	Disab...
<input type="checkbox"/>	192.168.0.200		NBR 126PA-5023121			TSCBC1025590	58:E8:76:60:58:84	camC1Q.DV0030	Disab...
<input type="checkbox"/>	192.168.0.206		NBR 126PA-5023121			TSCBC1025588	58:E8:76:60:58:83	camC1Q.DV0030	Disab...

Searching ...

Duration 90 Seconds 8 %

Step 2: Press done when searching is finish

Done



# How to assign IP ?

At DivioTec, our experience is your protection

**DIVIO**<sup>Tec</sup><sub>TM</sub>

## How to assign IP ?

IP CAM-FINDER 2 v1.3.1

Step 1: Select one Camera

Step 2: Choose Assign IP

Step 3: User can modify IP address

Step 4: Press Assign

The screenshot shows the IP CAM-FINDER 2 v1.3.1 software interface. The main window displays a table of cameras with columns for IP, Status, Model Name, Login ID, and Login Password. The first camera, with IP 192.168.0.206 and Model Name NBR126PA-5023121, is selected. The 'Assign IP' button is highlighted. A dialog box titled 'IP Address Configuration' is open, showing the 'Static IP Address' option selected. The IP Address field is set to 192.168.0.202, and the Subnet Mask is 255.255.255.0. The 'Assign' button is highlighted.

IP	Status	Model Name	Login ID	Login Password
192.168.0.206		NBR126PA-5023121		
192.168.0.204		NBR126PA-5023121		
192.168.0.211		NBR126PA-5023121		
192.168.0.207		NBR126PA-5023121		
192.168.0.108		NDR154P-522166		
192.168.0.208		NBR126PA-5023121		
192.168.0.209		NBR126PA-5023121		
192.168.0.210		NBR126PA-5023121		
192.168.0.205		NBR126PA-5023121		
192.168.0.203		NBR126PA-5023121		
192.168.0.201		NBR126PA-5023121		
192.168.0.200		NBR126PA-5023121		
192.168.0.206		NBR126PA-5023121		

Firmware	DHCP
camC1Q.DV0030	Disab...
camC1Q.DV0030	Disab...
camC1Q.DV0030	Disab...
camC1Q.DV0030	Disab...
cam16D.DV0108	Disab...
camC1Q.DV0030	Disab...
camC1Q.DV0030	Disab...
camC1Q.DV0030	Disab...
camC1Q.DV0030	Disab...
camC1Q.DV0030	Disab...
camC1Q.DV0030	Disab...
camC1Q.DV0030	Disab...
camC1Q.DV0030	Disab...
camC1Q.DV0030	Disab...

# How to assign IP ?


IP CAM-FINDER 2 v1.3.1

Step 5: Press Search to update the information

Search Assign IP Web Page Firmware Upgrade Configuration Enable DHCP Set Default IP Export Information

[...]	IP	Status	Model Name	Login ID	Login Password	S/N	MAC	Firmware	DHCP
<input checked="" type="checkbox"/>	192.168.0.202		NBR 126PA-5023121			TSCBC 1025579	58:E8:76:60:5B:95	camC1Q.DV0030	Disab...
<input type="checkbox"/>	192.168.0.204		NBR 126PA-5023121			TSCBC 1025596	58:E8:76:60:5B:91	camC1Q.DV0030	Disab...
<input type="checkbox"/>	192.168.0.211		NBR 126PA-5023121			TSCBC 1025585	58:E8:76:60:5B:86	camC1Q.DV0030	Disab...
<input type="checkbox"/>	192.168.0.207		NBR 126PA-5023121			TSCBC 1025604	58:E8:76:60:5B:99	camC1Q.DV0030	Disab...
<input type="checkbox"/>	192.168.0.108		NDR 154P-522166			180501556	58:E8:76:60:0A:DC	cam16D.DV0108	Disab...
<input type="checkbox"/>	192.168.0.208		NBR 126PA-5023121			TSCBC 1025597	58:E8:76:60:5B:90	camC1Q.DV0030	Disab...
<input type="checkbox"/>	192.168.0.209		NBR 126PA-5023121			TSCBC 1025598	58:E8:76:60:5B:8F	camC1Q.DV0030	Disab...
<input type="checkbox"/>	192.168.0.210		NBR 126PA-5023121			TSCBC 1025589	58:E8:76:60:5B:81	camC1Q.DV0030	Disab...
<input type="checkbox"/>	192.168.0.205		NBR 126PA-5023121			TSCBC 1025587	58:E8:76:60:5B:89	camC1Q.DV0030	Disab...
<input type="checkbox"/>	192.168.0.203		NBR 126PA-5023121			TSCBC 1025584	58:E8:76:60:5B:8D	camC1Q.DV0030	Disab...
<input type="checkbox"/>	192.168.0.201		NBR 126PA-5023121			TSCBC 1025591	58:E8:76:60:5B:88	camC1Q.DV0030	Disab...
<input type="checkbox"/>	192.168.0.200		NBR 126PA-5023121			TSCBC 1025590	58:E8:76:60:5B:84	camC1Q.DV0030	Disab...
<input type="checkbox"/>	192.168.0.206		NBR 126PA-5023121			TSCBC 1025588	58:E8:76:60:5B:83	camC1Q.DV0030	Disab...

Step 6: Completed



How to find camera web page ?

At DivioTec, our experience is your protection

**DIVIO**<sup>Tec</sup><sub>TM</sub>

## How to find camera web page ?

IP CAM-FINDER 2 v1.3.1

Step 1: Enable to select multiple Camera

Step 2: Choose Web Page

Step 3: Website shows up

	IP	Status	Model Name	Login ID	Login Password	S/N	MAC	Firmware	DHCP
<input checked="" type="checkbox"/>	192.168.0.202		NBR 126PA-5023121			TSCBC 1025579	58:E8:76:60:5B:95	camC 1Q_DV0030	Disab...
<input checked="" type="checkbox"/>	192.168.0.204		NBR 126PA-5023121						
<input checked="" type="checkbox"/>	192.168.0.211		NBR 126PA-5023121						
<input type="checkbox"/>	192.168.0.207		NBR 126PA-5023121						
<input type="checkbox"/>	192.168.0.108		NDR 154P-522166						
<input type="checkbox"/>	192.168.0.208		NBR 126PA-5023121						
<input type="checkbox"/>	192.168.0.209		NBR 126PA-5023121						
<input type="checkbox"/>	192.168.0.210		NBR 126PA-5023121						
<input type="checkbox"/>	192.168.0.205		NBR 126PA-5023121						
<input type="checkbox"/>	192.168.0.203		NBR 126PA-5023121						
<input type="checkbox"/>	192.168.0.201		NBR 126PA-5023121						
<input type="checkbox"/>	192.168.0.200		NBR 126PA-5023121						
<input type="checkbox"/>	192.168.0.206		NBR 126PA-5023121						

Assign IP

Web Page

Firmware Upgrade

Configuration

Enable DHCP

Set Default IP

Export Information

Divio

Step 3: Website shows up

At DivioTec, our experience is your protection



# How to do firmware upgrade ?

At DivioTec, our experience is your protection

**DIVIO**<sup>Tec</sup><sub>TM</sub>

# How to do firmware upgrade ?

IP CAM-FINDER 2 v1.3.1

Step 2: Choose Firmware Upgrade

Step 1: Enable to select multiple Camera

Assign IP Web Page Firmware Upgrade Configuration Enable DHCP Set Default IP Export Information


	IP	Status	Model Name	Login ID	Login Password	S/N	MAC	Firmware	DHCP
<input checked="" type="checkbox"/>	192.168.0.202		NBR126PA-5023121			TSCBC1025579	58:E8:76:60:58:95	camC1Q_DV0030	Disab...
<input checked="" type="checkbox"/>	192.168.0.204		NBR126PA-5023121						Disab...
<input checked="" type="checkbox"/>	192.168.0.211		NBR126PA-5023121						Disab...
<input checked="" type="checkbox"/>	192.168.0.207		NBR126PA-5023121						Disab...
<input checked="" type="checkbox"/>	192.168.0.108		NDR154P-522166						Disab...
<input checked="" type="checkbox"/>	192.168.0.208		NBR126PA-5023121						Disab...
<input checked="" type="checkbox"/>	192.168.0.209		NBR126PA-5023121						Disab...
<input type="checkbox"/>	192.168.0.210		NBR126PA-5023121						Disab...
<input type="checkbox"/>	192.168.0.205		NBR126PA-5023121						Disab...
<input type="checkbox"/>	192.168.0.203		NBR126PA-5023121						Disab...
<input type="checkbox"/>	192.168.0.201		NBR126PA-5023121						Disab...
<input type="checkbox"/>	192.168.0.200		NBR126PA-5023121						Disab...
<input type="checkbox"/>	192.168.0.206		NBR126PA-5023121						Disab...

Please open Firmware File

Step 3: Choose the Firmware

File name: fw\_camC1Q\_DV0030 \*.bin

Open Cancel



At DivioTec, our experience is your protection

# How to do firmware upgrade ?

CAM-FINDER 2 v1.3.1

Step 4: Press Search to update the information

Search Assign IP Web Page Firmware Upgrade Configuration Enable Step 5: Completed Add IP Export Information

[...]	IP	Status	Model Name	Login ID	Login Password	S/N	MAC	Firmware	DHCP
<input checked="" type="checkbox"/>	192.168.0.202		NBR 126PA-5023121			TSCBC1025579	58:E8:76:60:58:95	camC1Q.DV0030	Disab...
<input checked="" type="checkbox"/>	192.168.0.204		NBR 126PA-5023121			TSCBC1025596	58:E8:76:60:58:91	camC1Q.DV0030	Disab...
<input checked="" type="checkbox"/>	192.168.0.211		NBR 126PA-5023121			TSCBC1025585	58:E8:76:60:58:86	camC1Q.DV0030	Disab...
<input checked="" type="checkbox"/>	192.168.0.207		NBR 126PA-5023121			TSCBC1025604	58:E8:76:60:58:99	camC1Q.DV0030	Disab...
<input checked="" type="checkbox"/>	192.168.0.108		NDR 154P-522166			180501556	58:E8:76:60:0A:DC	cam16D.DV0108	Disab...
<input checked="" type="checkbox"/>	192.168.0.208		NBR 126PA-5023121			TSCBC1025597	58:E8:76:60:58:90	camC1Q.DV0030	Disab...
<input type="checkbox"/>	192.168.0.209		NBR 126PA-5023121			TSCBC1025598	58:E8:76:60:58:8F	camC1Q.DV0030	Disab...
<input type="checkbox"/>	192.168.0.210		NBR 126PA-5023121			TSCBC1025589	58:E8:76:60:58:81	camC1Q.DV0030	Disab...
<input type="checkbox"/>	192.168.0.205		NBR 126PA-5023121			TSCBC1025587	58:E8:76:60:58:89	camC1Q.DV0030	Disab...
<input type="checkbox"/>	192.168.0.203		NBR 126PA-5023121			TSCBC1025584	58:E8:76:60:58:8D	camC1Q.DV0030	Disab...
<input type="checkbox"/>	192.168.0.201		NBR 126PA-5023121			TSCBC1025591	58:E8:76:60:58:88	camC1Q.DV0030	Disab...
<input type="checkbox"/>	192.168.0.200		NBR 126PA-5023121			TSCBC1025590	58:E8:76:60:58:84	camC1Q.DV0030	Disab...
<input type="checkbox"/>	192.168.0.206		NBR 126PA-5023121			TSCBC1025588	58:E8:76:60:58:83	camC1Q.DV0030	Disab...

At DivioTec, our experience is your protection

How to do import/export configuration ?

# How to do download configuration ?

- This function allow user to export camera setting, in order to sync numerous cameras' settings at the same time.

IP CAM-FINDER 2 v1.3.1

Step 1: Select one Camera

Step 2: Choose Configuration

Step 3: Choose Configuration Download

Step 4: Choose Ok

	IP	Status	Model Name	Login ID	Login Password	S/N	MAC	Firmware	DHCP
<input checked="" type="checkbox"/>	192.168.0.202		NBR 126PA-5023121			TSCBC 1025579	58:E8:76:60:58:95	camC1Q.DV0030	Disab...
<input type="checkbox"/>	192.168.0.204		NBR 126PA-5023121			TSCBC 1025596	58:E8:76:60:58:91	camC1Q.DV0030	Disab...
<input type="checkbox"/>	192.168.0.211		NBR 126PA-5023121			TSCBC 1025585	58:E8:76:60:58:86	camC1Q.DV0030	Disab...
<input type="checkbox"/>	192.168.0.207		NBR 126PA-5023121				58:76:60:58:99	camC1Q.DV0030	Disab...
<input type="checkbox"/>	192.168.0.108		NDR 154P-522166				58:76:60:0A:DC	cam16D.DV0108	Disab...
<input type="checkbox"/>	192.168.0.208		NBR 126PA-5023121				58:76:60:58:95		
<input type="checkbox"/>	192.168.0.209		NBR 126PA-5023121				58:76:60:58:95		
<input type="checkbox"/>	192.168.0.210		NBR 126PA-5023121				58:76:60:58:95		
<input type="checkbox"/>	192.168.0.205		NBR 126PA-5023121				58:76:60:58:95		
<input type="checkbox"/>	192.168.0.203		NBR 126PA-5023121				58:76:60:58:95		
<input type="checkbox"/>	192.168.0.201		NBR 126PA-5023121				58:76:60:58:95		
<input type="checkbox"/>	192.168.0.200		NBR 126PA-5023121				58:76:60:58:95		
<input type="checkbox"/>	192.168.0.206		NBR 126PA-5023121				58:76:60:58:95		

Configuration Upload/Download

☐ Configuration Upload

☐ Configuration Download

OK Cancel

CAM-FINDER 2

Download Configuration.

Selected 1 device(s).

IP Camera will export Configuration. Are you sure?

OK Cancel

## How to do download configuration ?

IP CAM-FINDER 2 v1.3.1

Search Assign IP Web Page Firmware Upgrade Configuration Enable DHCP Set Default IP Export Information

[...]	IP	Status	Model Name	Login ID	Login Password	S/N	MAC	Firmware	DHCP
<input checked="" type="checkbox"/>	192.168.0.202		NBR 126PA-5023121			TSCBC1025579	58:E8:76:60:58:95	camC1Q.DV0030	Disab...
<input type="checkbox"/>	192.168.0.204		NBR 126PA-5023121			TSCBC1025596	58:E8:76:60:58:91	camC1Q.DV0030	Disab...
<input type="checkbox"/>	192.168.0.211		NBR 126PA-5023121			TSCBC1025585	58:E8:76:60:58:86	camC1Q.DV0030	Disab...
<input type="checkbox"/>	192.168.0.207		NBR 126PA-5023121			TSCBC1025604	58:E8:76:60:58:99	camC1Q.DV0030	Disab...
<input type="checkbox"/>	192.168.0.108		NDR 154P-522166			180501556	58:E8:76:60:0A:DC	cam16D.DV0108	Disab...
<input type="checkbox"/>	192.168.0.208		NBR 126PA-5023121			TSCBC1025597	58:E8:76:60:58:90	camC1Q.DV0030	Disab...
<input type="checkbox"/>	192.168.0.209		NBR 126PA-5023121						
<input type="checkbox"/>	192.168.0.210		NBR 126PA-5023121						
<input type="checkbox"/>	192.168.0.205		NBR 126PA-5023121						
<input type="checkbox"/>	192.168.0.203		NBR 126PA-5023121						
<input type="checkbox"/>	192.168.0.201		NBR 126PA-5023121						
<input type="checkbox"/>	192.168.0.200		NBR 126PA-5023121						
<input type="checkbox"/>	192.168.0.206		NBR 126PA-5023121						

File Home Share View

< > > CAM-FINDER > v1.1.0.4 > ExportedConfigs >

Name	Date modified	Type	Size
192.168.0.202	2021-08-02 10:21	WinRAR ZIP archive	9 KB

Step 5: Camera setting data will be downloaded to CAM-Finder folder as a compressed file, you can find the file in "Exported Configs"



# How to do upload configuration ?

- This function allow user to import camera setting, in order to sync numerous cameras' settings at the same time.

IP CAM-FINDER 2 v1.3.1

Step 1: Enable to select multiple cameras

Step 2: Choose Configuration

Step 3: Choose Configuration Upload


[...]	IP	Status	Model Name	Login ID	Login Password	S/N	MAC	Firmware	DHCP
<input type="checkbox"/>	192.168.0.202		NBR 126PA-5023121	Default	Default	TSCBC 1025579	58:E8:76:60:5B:95	camC1Q.DV0030	Disab...
<input checked="" type="checkbox"/>	192.168.0.209		NBR 126PA-5023121			TSCBC 1025598	58:E8:76:60:5B:8F	camC1Q.DV0030	Disab...
<input checked="" type="checkbox"/>	192.168.0.208		NBR 126PA-5023121				8:76:60:5B:90	camC1Q.DV0030	Disab...
<input checked="" type="checkbox"/>	192.168.0.108		NDR 154P-522166				8:76:60:0A:DC	cam 16D.DV0108	Disab...
<input type="checkbox"/>	192.168.0.207		NBR 126PA-5023121				58:76:60:5B:99	camC1Q.DV0030	Disab...
<input type="checkbox"/>	192.168.0.210		NBR 126PA-5023121	Default			58:76:60:5B:81	camC1Q.DV0030	Disab...
<input type="checkbox"/>	192.168.0.206		NBR 126PA-5023121				58:76:60:5B:83	camC1Q.DV0030	Disab...
<input type="checkbox"/>	192.168.0.203		NBR 126PA-5023121				58:76:60:5B:8D	camC1Q.DV0030	Disab...
<input type="checkbox"/>	192.168.0.211		NBR 126PA-5023121				58:76:60:5B:86	camC1Q.DV0030	Disab...
<input type="checkbox"/>	192.168.0.204		NBR 126PA-5023121				58:76:60:5B:91	camC1Q.DV0030	Disab...
<input type="checkbox"/>	192.168.0.205		NBR 126PA-5023121				58:76:60:5B:89	camC1Q.DV0030	Disab...
<input type="checkbox"/>	192.168.0.201		NBR 126PA-5023121				58:76:60:5B:88	camC1Q.DV0030	Disab...
<input type="checkbox"/>	192.168.0.200		NBR 126PA-5023121				58:76:60:5B:84	camC1Q.DV0030	Disab...

Configuration Upload/Download

☐ Configuration Upload

☐ Configuration Download

OK Cancel

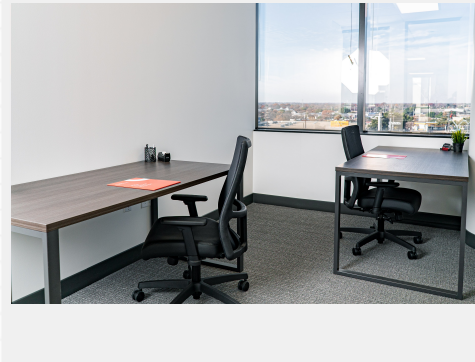

## How to do upload configuration ?

CAM-FINDER 2 v1.3.1

Search Assign IP Web Page Firmware Upgrade Configuration Enable DHCP Set Default IP Export Information

[...]	IP	Status	Model Name	Login ID	Login Password	S/N	MAC	Firmware	DHCP
<input type="checkbox"/>	192.168.0.202		NBR 126PA-5023121	Default	Default	TSCBC 1025579	58:E8:76:60:5B:95	camC1Q.DV0030	Disab...
<input checked="" type="checkbox"/>	192.168.0.209		NBR 126PA-5023121			TSCBC 1025598	58:E8:76:60:5B:8F	camC1Q.DV0030	Disab...
<input checked="" type="checkbox"/>	192.168.0.208		NBR 126PA-5023121			TSCBC 1025597	58:E8:76:60:5B:90	camC1Q.DV0030	Disab...
<input checked="" type="checkbox"/>	192.168.0.108		NDR 154P-522166			180501556	58:E8:76:60:0A:DC	cam16D.DV0108	Disab...
<input type="checkbox"/>	192.168.0.207		NBR 126PA-5023121			TSCBC 1025604	58:E8:76:60:5B:99	camC1Q.DV0030	Disab...
<input type="checkbox"/>	192.168.0.210		NBR 126PA-50231						
<input type="checkbox"/>	192.168.0.206		NBR 126PA-50231						
<input type="checkbox"/>	192.168.0.203		NBR 126PA-50231						
<input type="checkbox"/>	192.168.0.211		NBR 126PA-50231						
<input type="checkbox"/>	192.168.0.204		NBR 126PA-50231						
<input type="checkbox"/>	192.168.0.205		NBR 126PA-50231						
<input type="checkbox"/>	192.168.0.201		NBR 126PA-50231						
<input type="checkbox"/>	192.168.0.200		NBR 126PA-50231						

ExportedConfigs

File Home Share View

< > > CAM-FINDER > v1.1.0.4 > ExportedConfigs >

Name	Date modified	Type	Size
192.168.0.202	2021-08-02 10:21	WinRAR ZIP archive	9 KB

Quick access

- Desktop
- Downloads
- Documents
- Pictures

Step 4: choose the previous download file and upload, then you can sync all cameras' settings

# How to set enable DHCP ?

## How to set enable DHCP ?

- This function allow user to do DHCP for selected camera(s).

**IP CAM-FINDER 2 v1.3.1**


**Step 1: Enable to select multiple cameras**

**Step 2: Choose Enable DHCP**

Search Assign IP Web Page Firmware Upgrade Configuration **Enable DHCP** Set Default IP Export Information

[...]	IP	Status	Model Name	Login ID	Login Password	S/N	MAC	Firmware	DHCP
<input type="checkbox"/>	192.168.1.130		NBR 126PA-5023121	Default	Default	TSCBC1025590	58:E8:76:60:5B:84	camC1Q.DV0030	Enabled
<input type="checkbox"/>	192.168.0.250		NBR 126PA-5023121	Default	Default	TSCBC1025598	58:E8:76:60:5B:8F	camC1Q.DV0030	Disab...
<input type="checkbox"/>	192.168.0.250		NBR 126PA-5023121			TSCBC1025579	58:E8:76:60:5B:95	camC1Q.DV0030	Disab...
<input checked="" type="checkbox"/>	192.168.0.250		NBR 126PA-5023121	Default	Default	TSCBC1025598	58:E8:76:60:5B:8F	camC1Q.DV0030	Disab...
<input checked="" type="checkbox"/>	192.168.0.250		NBR 126PA-5023121			TSCBC1025579	58:E8:76:60:5B:95	camC1Q.DV0030	Disab...
<input checked="" type="checkbox"/>	192.168.0.250		NBR 126PA-5023121	Default	Default	TSCBC1025598	58:E8:76:60:5B:8F	camC1Q.DV0030	Disab...
<input type="checkbox"/>	192.168.1.128		NBR 126PA-5023121	Default	Default	TSCBC1025591	58:E8:76:60:5B:88	camC1Q.DV0030	Enabled
<input type="checkbox"/>	192.168.1.124		NDR 154P-522166	Default	Default	180501556	58:E8:76:60:0A:DC	cam16D.DV0108	Enabled
<input type="checkbox"/>	192.168.0.250		NBR 126PA-5023121			TSCBC1025584	58:E8:76:60:5B:8D	camC1Q.DV0030	Disab...
<input type="checkbox"/>	192.168.0.250		NBR 126PA-5023121	Default	Default	TSCBC1025589	58:E8:76:60:5B:81	camC1Q.DV0030	Disab...
<input type="checkbox"/>	192.168.0.250		NBR 126PA-5023121	Default	Default	TSCBC1025604	58:E8:76:60:5B:99	camC1Q.DV0030	Disab...
<input type="checkbox"/>	192.168.1.126		NBR 126PA-5023121	Default	Default	TSCBC1025588	58:E8:76:60:5B:83	camC1Q.DV0030	Enabled
<input type="checkbox"/>	192.168.0.205		NBR 126PA-5023121			TSCBC1025587	58:E8:76:60:5B:89	camC1Q.DV0030	Disab...

192.168.0.202



## How to set enable DHCP ?


IP CAM-FINDER 2 v1.3.1

Step 3: Press Search to update the information

Search Assign IP Web Page Firmware Upgrade Configuration Enable DHCP Set Default IP Export Information

[...]	IP	Status	Model Name	Login ID	Login Password	S/N	MAC	Firmware	DHCP
<input type="checkbox"/>	192.168.1.130		NBR 126PA-5023121	Default	Default	TSCBC1025590	58:E8:76:60:5B:84	camC1Q.DV0030	Enabled
<input type="checkbox"/>	192.168.0.250		NBR 126PA-5023121	Default	Default	TSCBC1025598	58:E8:76:60:5B:8F	camC1Q.DV0030	Disab...
<input type="checkbox"/>	192.168.0.250		NBR 126PA-5023121			TSCBC1025579	58:E8:76:60:5B:95	camC1Q.DV0030	Disab...
<input checked="" type="checkbox"/>	192.168.1.131		NBR 126PA-5023121	Default	Default	TSCBC1025596	58:E8:76:60:5B:91	camC1Q.DV0030	Enabled
<input checked="" type="checkbox"/>	192.168.1.129					TSCBC1025585	58:E8:76:60:5B:86	camC1Q.DV0030	Enabled
<input checked="" type="checkbox"/>	192.168.1.121			Default	Default	TSCBC1025597	58:E8:76:60:5B:90	camC1Q.DV0030	Enabled
<input type="checkbox"/>	192.168.1.128		NBR 126PA-5023121	Default	Default	TSCBC1025591	58:E8:76:60:5B:88	camC1Q.DV0030	Enabled
<input type="checkbox"/>	192.168.1.124		NDR 154P-522166	Default	Default	180501556	58:E8:76:60:0A:DC	cam16D.DV0108	Enabled
<input type="checkbox"/>	192.168.0.250		NBR 126PA-5023121			TSCBC1025584	58:E8:76:60:5B:8D	camC1Q.DV0030	Disab...
<input type="checkbox"/>	192.168.0.250		NBR 126PA-5023121	Default	Default	TSCBC1025589	58:E8:76:60:5B:81	camC1Q.DV0030	Disab...
<input type="checkbox"/>	192.168.0.250		NBR 126PA-5023121	Default	Default	TSCBC1025604	58:E8:76:60:5B:99	camC1Q.DV0030	Disab...
<input type="checkbox"/>	192.168.1.126		NBR 126PA-5023121	Default	Default	TSCBC1025588	58:E8:76:60:5B:83	camC1Q.DV0030	Enabled
<input type="checkbox"/>	192.168.0.205		NBR 126PA-5023121			TSCBC1025587	58:E8:76:60:5B:89	camC1Q.DV0030	Disab...

Step 4: Completed



# How to set default IP ?

At DivioTec, our experience is your protection

**DIVIO**<sup>Tec</sup>  
TM



# How to set default IP ?

- This function allow user to Set Default IP for selected camera(s).


**IP CAM-FINDER 2 v1.3.1**

**Step 1: Enable to select multiple cameras**

**Step 2: Choose Set Default IP**

Search Assign IP Web Page Firmware Upgrade Configuration Enable DHCP **Set Default IP** Export Information

[...]	IP	Status	Model Name	Login ID	Login Password	S/N	MAC	Firmware	DHCP
<input type="checkbox"/>	192.168.1.130		NBR 126PA-5023121	Default	Default	TSCBC1025590	58:E8:76:60:5B:84	camC1Q.DV0030	Enabled
<input type="checkbox"/>	192.168.0.250		NBR 126PA-5023121	Default	Default	TSCBC1025598	58:E8:76:60:5B:8F	camC1Q.DV0030	Disab...
<input type="checkbox"/>	192.168.0.250		NBR 126PA-5023121			TSCBC1025579	58:E8:76:60:5B:95	camC1Q.DV0030	Disab...
<input checked="" type="checkbox"/>	192.168.1.131		NBR 126PA-5023121	Default	Default	TSCBC1025596	58:E8:76:60:5B:91	camC1Q.DV0030	Enabled
<input checked="" type="checkbox"/>	192.168.1.129		NBR 126PA-5023121			TSCBC1025585	58:E8:76:60:5B:86	camC1Q.DV0030	Enabled
<input checked="" type="checkbox"/>	192.168.1.121		NBR 126PA-5023121	Default	Default	TSCBC1025597	58:E8:76:60:5B:90	camC1Q.DV0030	Enabled
<input type="checkbox"/>	192.168.1.128		NBR 126PA-5023121	Default	Default	TSCBC1025591	58:E8:76:60:5B:88	camC1Q.DV0030	Enabled
<input type="checkbox"/>	192.168.1.124		NDR 154P-522166	Default	Default	180501556	58:E8:76:60:0A:DC	cam16D.DV0108	Enabled
<input type="checkbox"/>	192.168.0.250		NBR 126PA-5023121				58:E8:76:60:5B:8D	camC1Q.DV0030	Disab...
<input type="checkbox"/>	192.168.0.250		NBR 126PA-5023121	Default	Default	192.168.0.202	58:E8:76:60:5B:81	camC1Q.DV0030	Disab...
<input type="checkbox"/>	192.168.0.250		NBR 126PA-5023121	Default	Default	TSCBC1025604	58:E8:76:60:5B:99	camC1Q.DV0030	Disab...
<input type="checkbox"/>	192.168.1.126		NBR 126PA-5023121	Default	Default	TSCBC1025588	58:E8:76:60:5B:83	camC1Q.DV0030	Enabled
<input type="checkbox"/>	192.168.0.205		NBR 126PA-5023121			TSCBC1025587	58:E8:76:60:5B:89	camC1Q.DV0030	Disab...



## How to set default IP ?


IP CAM-FINDER 2 v1.3.1

Step 3: Press Search to update the information

Search Assign IP Web Page Firmware Upgrade Configuration Enable DHCP Set Default IP Export Information

[...]	IP	Status	Model Name	Login ID	Login Password	S/N	MAC	Firmware	DHCP
<input type="checkbox"/>	192.168.1.130		NBR 126PA-5023121	Default	Default	TSCBC1025590	58:E8:76:60:5B:84	camC1Q.DV0030	Enabled
<input type="checkbox"/>	192.168.0.250		NBR 126PA-5023121	Default	Default	TSCBC1025598	58:E8:76:60:5B:8F	camC1Q.DV0030	Disab...
<input type="checkbox"/>	192.168.0.250		NBR 126PA-5023121			TSCBC1025579	58:E8:76:60:5B:95	camC1Q.DV0030	Disab...
<input checked="" type="checkbox"/>	192.168.0.250		NBR 126PA-5023121	Default	Default	TSCBC1025598	58:E8:76:60:5B:8F	camC1Q.DV0030	Disab...
<input checked="" type="checkbox"/>	192.168.0.250		NBR 126PA-5023121	Default	Default	TSCBC1025579	58:E8:76:60:5B:95	camC1Q.DV0030	Disab...
<input checked="" type="checkbox"/>	192.168.0.250		NBR 126PA-5023121	Default	Default	TSCBC1025598	58:E8:76:60:5B:8F	camC1Q.DV0030	Disab...
<input type="checkbox"/>	192.168.1.128		NBR 126PA-5023121	Default	Default	TSCBC1025591	58:E8:76:60:5B:88	camC1Q.DV0030	Enabled
<input type="checkbox"/>	192.168.1.124		NDR 154P-522166	Default	Default	180501556	58:E8:76:60:0A:DC	cam16D.DV0108	Enabled
<input type="checkbox"/>	192.168.0.250		NBR 126PA-5023121			TSCBC1025584	58:E8:76:60:5B:8D	camC1Q.DV0030	Disab...
<input type="checkbox"/>	192.168.0.250		NBR 126PA-5023121	Default	Default	TSCBC1025589	58:E8:76:60:5B:81	camC1Q.DV0030	Disab...
<input type="checkbox"/>	192.168.0.250		NBR 126PA-5023121	Default	Default	TSCBC1025604	58:E8:76:60:5B:99	camC1Q.DV0030	Disab...
<input type="checkbox"/>	192.168.1.126		NBR 126PA-5023121	Default	Default	TSCBC1025588	58:E8:76:60:5B:83	camC1Q.DV0030	Enabled
<input type="checkbox"/>	192.168.0.205		NBR 126PA-5023121			TSCBC1025587	58:E8:76:60:5B:89	camC1Q.DV0030	Disab...

Step 4: Completed



# How to export information ?

At DivioTec, our experience is your protection

**DIVIO**<sup>Tec</sup><sub>TM</sub>

# How to export information ?

- This function allow user to export some information in the table into a .CSV file.

CAM-FINDER 2 v1.3.1

Step 1: Enable to select multiple cameras

Assign IP Web Page Firmware Upgrade Configuration Enable DHCP Set Default IP Export Information

[...]	IP	Status	Model Name	Login ID	Login Password	S/N	MAC	Firmware	DHCP
<input type="checkbox"/>	192.168.0.109		NDR155PA-5023122			TSCB31002029	58:E8:76:60:55:FA	camC1Q.DV0030	Disab...
<input checked="" type="checkbox"/>	192.168.0.165		NDR155P-5021223			200702138	58:E8:76:60:4D:31	cam16F.DV0027	Disab...
<input checked="" type="checkbox"/>	192.168.0.166		NDR154P-5021225			200701012	58:E8:76:60:4C:B3	cam16F.DV0020	Disab...
<input checked="" type="checkbox"/>	192.168.0.108		NDR154P-522166			180501556	58:E8:76:60:0A:DC	cam16D.DV0108	Disab...
<input type="checkbox"/>	192.168.0.164		NDR155P-5021223			200702180	58:E8:76:60:4D:5B	cam16F.DV0027	Disab...


Step 2: Choose Export Information

CAM-FINDER 2


The Information is exported to 'ExportedInfos' folder.

OK

Step 3: Export the Information of Cameras



# How to export information ?

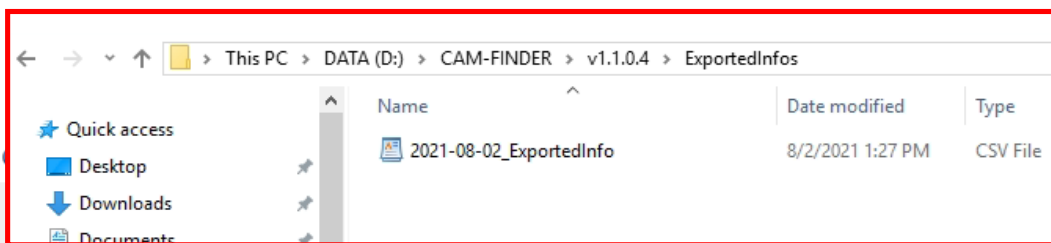

Step 4: The Information of Cameras will be exported to CAM-Finder folder as a CVS file, you can find the file in "Exported Info"

[...]	IP	Status	Model Name	Login ID	Login Password	S/N	MAC	Firmware	DHCP
<input type="checkbox"/>	192.168.0.109		NDR155PA-5023122			TSCB31002029	58:E8:76:60:55:FA	camC1Q.DV0030	Disab...
<input checked="" type="checkbox"/>	192.168.0.165		NDR155P-5021223			200702138	58:E8:76:60:4D:31	cam16F.DV0027	Disab...
<input checked="" type="checkbox"/>	192.168.0.166		NDR154P-5021225			200701012	58:E8:76:60:4C:B3	cam16D.DV0020	
<input checked="" type="checkbox"/>	192.168.0.108		NDR154P-522166			180501556	58:E8:76:60:0A:DC	cam16D.DV0108	
<input type="checkbox"/>	192.168.0.164		NDR155P-5021223			200702138	58:E8:76:60:4D:31	cam16F.DV0027	

2021-08-02\_ExportedInfo - WordPad

```

"Camera Information"
="camC6G.DV0046"
"192.168.0.165", "NDR155P", "200702138", "58:E8:76:60:4D:31",
"cam16F.DV0027"
"192.168.0.166", "NDR154P", "200701012", "58:E8:76:60:4C:B3",
"cam16D.DV0020"
"192.168.0.108", "NDR154P", "180501556", "58:E8:76:60:0A:DC",
"cam16D.DV0108"
    
```

Step 5: User is able to glance the Information of cameras on WordPad

# Features

- Shorten progress of installation , upgrade and sync
  - Allow Multiple Firmware Update
  - Configuration function allow user to import/export cameras settings
- Allow user convenient to get or modify camera IP address
  - Assign IP, Enable DHCP, Set Default IP function can meet any requirements
- “Export Information” function assist quality and product management

# Benefits

- Job Site – Commission Status
- Quality Management
- Maintenance